




ASSEMBLY INSTRUCTION

SCDP-* | Rubber sealing D-Size Chassis Connectors

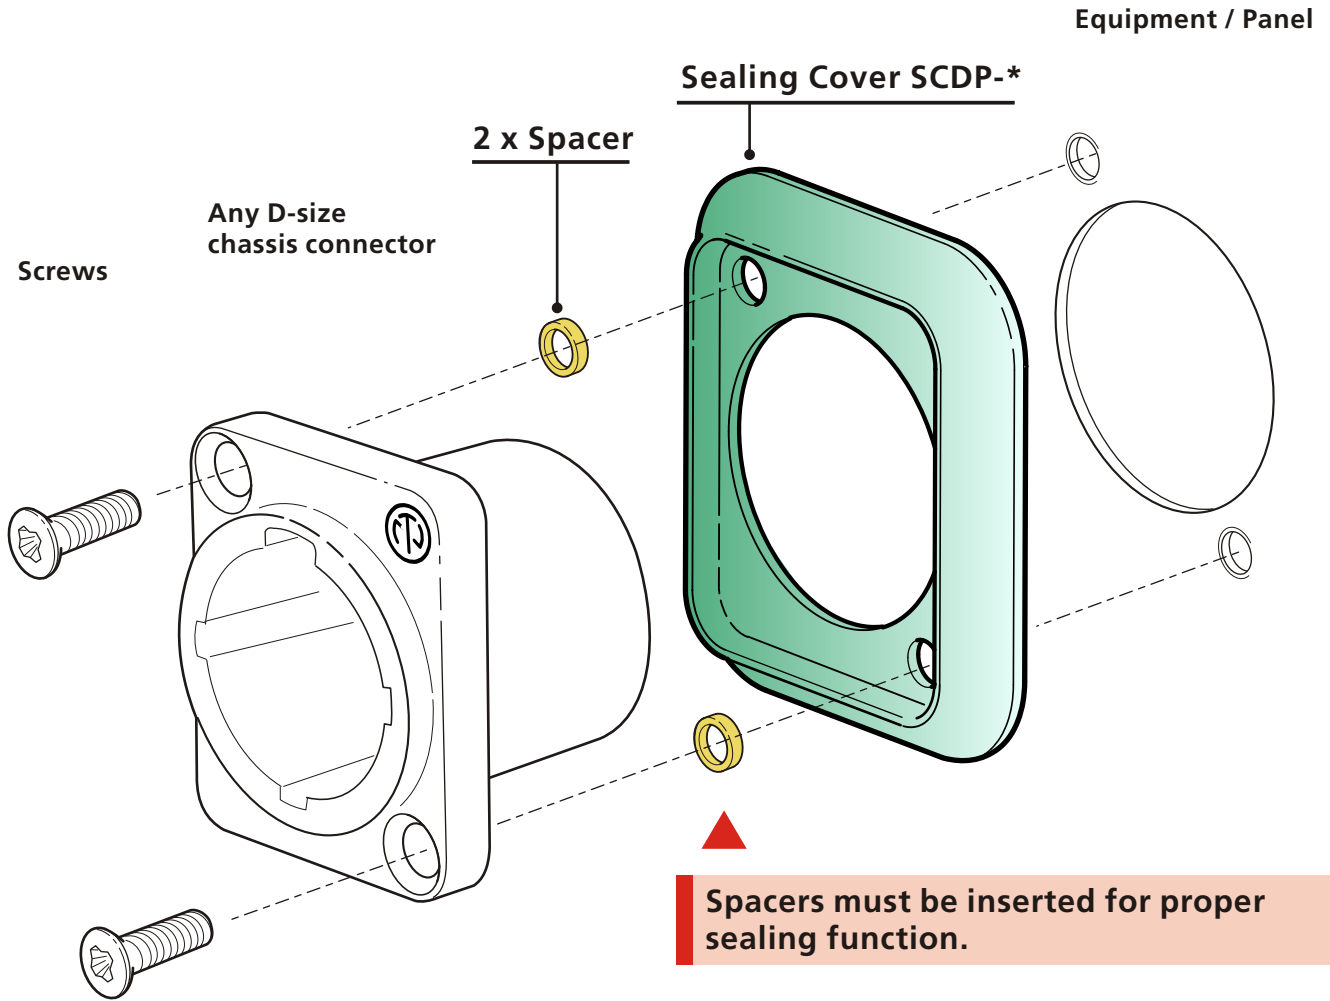

▲

ATTENTION:
Maximum allowable torque
 $M_A = 40 \text{ Ncm}$

* Color coding: 0- black, 2- red, 4- yellow, 5- green, 6- blue, 9- white

| | | | | | | | |
|------------------------|-------------|-----------------------|---------------------|-------------------------|-----|----------------------|---------------------|
| NEUTRIK AG | LI | T: +423/237 24 24 | F: +423/232 53 93 | NEUTRIK France | FR | T: +33 1/4131 6750 | F: +33 1/4131 0511 |
| NEUTRIK USA Inc. | USA | T: +1 704 / 972 3050 | F: +1 704/438 9202 | NEUTRIK Tokyo Ltd. | JP | T: +81 3/3663 4733 | F: +81 3/3663 4796 |
| NEUTRIK (UK) Ltd. | UK | T: +44 1983/811 441 | F: +44 1983/811 439 | NEUTRIK Hong Kong Ltd. | HK | T: +852/2687 6055 | F: +852/2687 6052 |
| NEUTRIK Vertriebs GmbH | DE/NL/AT/DK | T: +49 8131 / 280 890 | F: +49 8131/280 830 | NEUTRIK India Pvt. Ltd. | IND | T: +91/982 05 43 424 | F: +91/22 26163 540 |

Draft. Nr.: BDA 402 | Update: 21.03.2014 | Data subject to change without prior notice. ©2014 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.