


SOMMER CABLE

ITEM		SPECIFICATION	
CONDUCTOR	AWG	28AWG	28AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND.SIZE	7/0.127±0.008 mm	7/0.127±0.008 mm
INSULATION	MIN.AVG.THICK	0.20 mm	0.12 mm
	MATERIAL	FM-PE+SKIN	HD-PE
	O . D	0.98± 0.05 mm	0.70 ± 0.05 mm
	N O.	1P*7	1P+3C
DRAIN	AWG	28AWG	/
	MATERIAL	TINNED COPPER	/
	SIZE	7/0.127±0.008 mm×1PC	/
FACE INSIDE	COVERAGE	100%	/
	AL.Mylar OVERLAP	25% MIN	/
MYLAR	COVERAGE	100%	/
	OVERLAP	25% MIN	/
MYLAR	COVERAGE	/	/
	OVERLAP	/	/
FACE OUTSIDE	COVERAGE	100%	/
	AL.Mylar OVERLAP	25%MIN	/
DRAIN	AWG	26AWG	/
	MATERIAL	TINNED COPPER	/
	SIZE	7/0.16±0.008 mm×1PC	/
BRAID	MATERIAL	A-M ALLOY	/
	SIZE	16*8/0.12±0.008 mm	/
	MIN.AVG.THICK	0.51 mm	/
JACKET	MATERIAL	MATT PVC LOW TOXIC	/
	COLOUR	UL813 BLACK	/
	O . D	8.60 ± 0.15 mm	/

CONSTRUCTION D.W.G

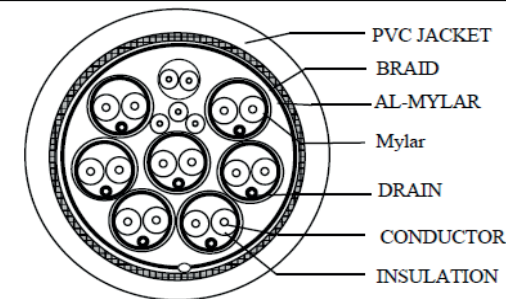

Artikelnummer: HI-DV24-0050

DVI 24+1 Kabel male↔male Länge 0.5m -Belegung DVI-D Dual-Link 24+1 / -hochflexible SOMMER CABLE Leitung AWG28

-ohne Ferritkerne / -voll geschirmte Steckverbinder / -schlanke, elegante HICON Steckverbinder / -Vollmetall Rändelschrauben

EAN-Code: 4049371811712

Art. No. HI-DV24-0050

Checked: FV

Size: A4

Date: 19.08.2015

Page 1



SOMMER CABLE GmbH
Humboldtstraße 32-36
75334 Straubenhardt / Germany

Telefon: +49 (0)7082-49133-0
Support Tel: +49 (0)7082-49133-10
Fax: +49 (0)7082-49133-11
E-Mail: info@sommercable.com